

Changing the Default Password



1. Open the Administration Window

From MxManagementCenter:

- Use the following keyboard shortcut to switch from MxMC to the administration window of the camera:

Mac: + +

Windows: + +

This shortcut is only valid for the selected camera in the focus window of MxMC.

- The keyboard shortcut will automatically direct you to the administration window of the selected camera.

In the Browser:


- Open the user interface of the camera in the browser: `http://<IP address of camera>`
- Click on the „Admin Menu“ button.

2. Change the Password

- Click on **Security > Users and Passwords**.
- Enter the new password for the admin user in the **Password** field and again in the **Confirm Password** field.
- Click on **Set** to apply the changes.
- Click on **Close** to store the changes in the permanent memory of the camera.
- Close the prompt by clicking on **OK**.
- Enter the new password for the *admin* user when prompted for a password.
- Write down the password and store it in a safe place.



1. Open the Administration Window

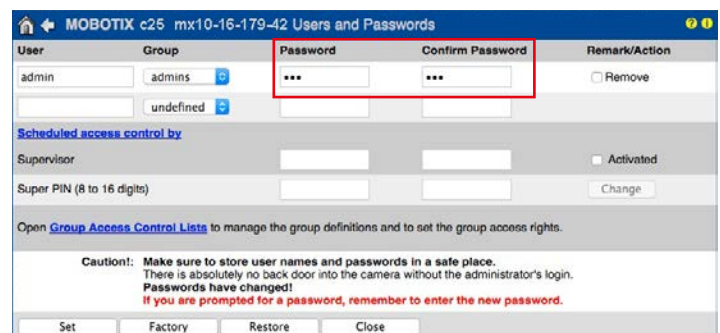

2. Change the Password